



BKHU/BKHU3 Series Manifold Mount Ball Valves

SPECIFICATIONS

- Block body
- Full port
- Delrin ball seats
- Viton-O-Rings
- Temp range -20°F to 215°F
- Black oxide coating
- Nickel plated ball

OPTIONS

- Lock kits
- Actuator packages
- Straight handles
- Red aluminum handles
- Special ball seats and seals for higher temperature and aggressive applications
- Stainless Steel



BKHU/BKHU3 SERIES


2-WAY

SIZE	PART NUMBER	WORKING PRESSURE		DIMENSIONS (IN.)								
		PSI	BAR	a	B	b	d2	H	H1	H2	H4	L
1/4	BKHU-DN06-1125	7250	500	1.54	1.93	1.38	.33	1.93	1.50	.31	.75	2.24
3/8	BKHU-DN10-1125	7250	500	1.73	2.17	1.57	.35	2.05	1.61	.31	.75	2.80
1/2	BKHU-DN13-1125	7250	500	2.28	2.36	1.77	.35	2.40	1.97	.31	1.06	3.88
3/4	BKHU-DN20-1125	5880	400	2.72	2.76	2.00	.41	3.39	2.76	.47	1.52	4.65
1	BKHU-DN25-1125	5880	400	3.19	3.15	2.36	.51	3.78	3.15	.47	1.77	5.39
1 1/4	BKHU-DN32-1125	4570	315	3.78	3.94	3.07	.51	4.69	3.94	.53	2.13	6.52
1 1/2	BKHU-DN40-1125	4570	315	4.41	5.12	3.74	.67	4.69	3.94	.53	2.13	7.20
2	BKHU-DN50-1125	4570	315	5.35	5.91	4.41	.87	5.28	4.53	.53	2.13	8.70

3-WAY

SIZE	PART NUMBER	WORKING PRESSURE		DIMENSIONS (IN.)								
		PSI	BAR	a	B	b	d2	H	H1	H2	H4	L
1/4	BKHU3-DN06-1125	7250	500	1.54	1.93	1.38	.33	1.93	1.50	.31	.75	2.24
3/8	BKHU3-DN10-1125	7250	500	1.73	2.17	1.57	.35	2.05	1.61	.31	.75	2.80
1/2	BKHU3-DN13-1125	7250	500	2.28	2.36	1.77	.35	2.40	1.97	.31	1.06	3.88
3/4	BKHU3-DN20-1125	5880	400	2.72	2.76	2.00	.41	3.39	2.76	.47	1.52	4.65
1	BKHU3-DN25-1125	5880	400	3.19	3.15	2.36	.51	3.78	3.15	.47	1.77	5.39
1 1/4	BKHU3-DN32-1125	4570	315	3.78	3.94	3.07	.51	4.69	3.94	.53	2.13	6.52
1 1/2	BKHU3-DN40-1125	4570	315	4.41	5.12	3.74	.67	4.69	3.94	.53	2.13	7.20
2	BKHU3-DN50-1125	4570	315	5.35	5.91	4.41	.87	5.28	4.53	.53	2.13	8.70

VALVES

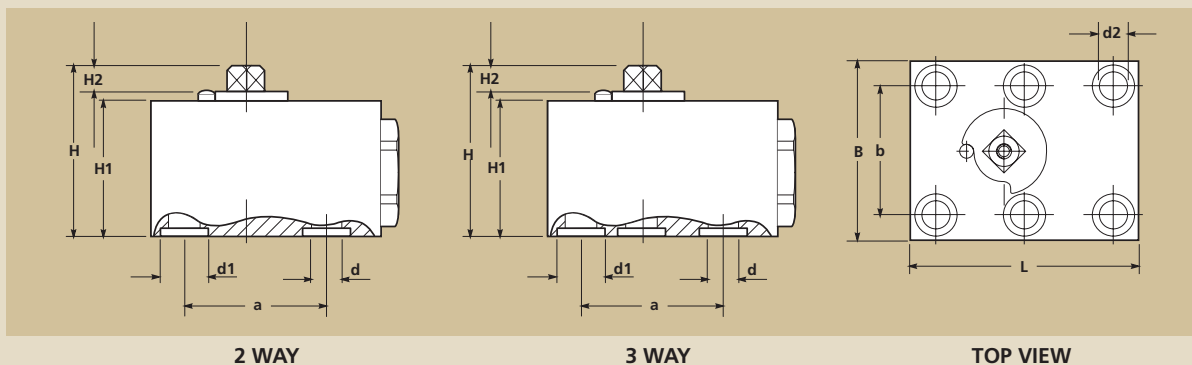

See page 65 for full safety information.